


Engineering Data Sheet

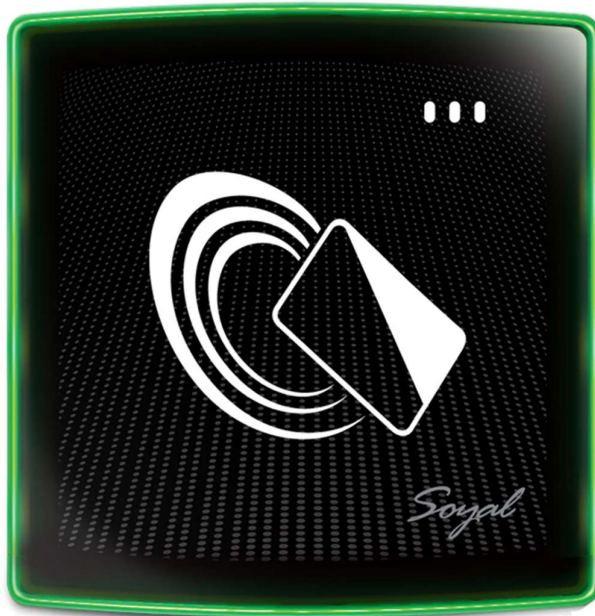

AR-888U

Proximity reader


- Illuminated Proximity Reader
- IP55 Weather Resistant Design
- 1 bi-colour LED, 3 one-colour LED & 1 beeper for identification
- Semi-flush mounted design gives neat installation
- 2 Sets of LED input can indicate other equipment status.
- Designed to fit standard 47mm single gang back box
- 10mm spacer available for additional connector clearance.

Brand

SOYAL®

General Information

This proximity reader signifies a new era in access control innovation. The neat and attractive design makes this reader ideal for any commercial or residential application.

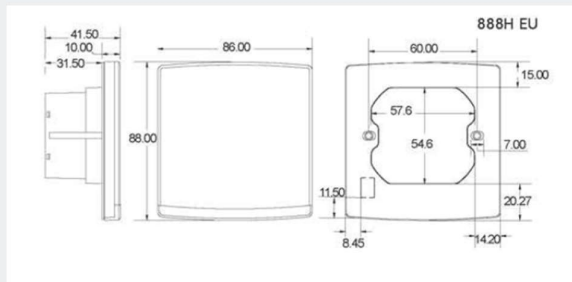

Specifications

Frequency	125khz
Reading Range	5-10cm
Power Supply	9-15VDC
Comm Interface	WG26, WG34, ABA-11, ASYNC
Baud Rate	9600 bps
Ingress Protection	IP55
Indicator	1 Bi-colour LED & 1 sounder
Housing Material	ABS/PC Panel
Colour	Black
Dimensions	88H X 86W X 9D/43D

Form : AR888U 190822

Rev 1.0.0