


## Engineering Data Sheet



### Brand

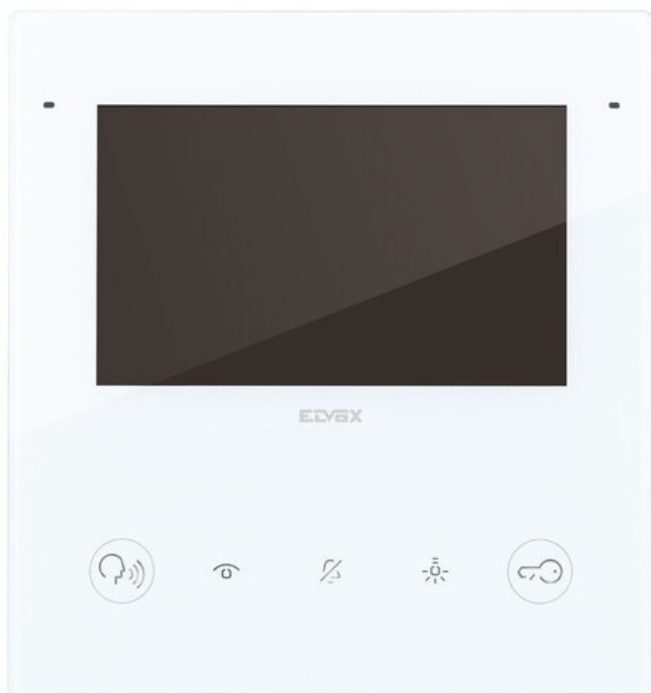

 **VIMAR** group

### General Information

The 40515 Tab 5S UP video monitor has a 5" capacitive colour touch screen. The monitor has dedicated controls for call acceptance and lock release. It is recommended that the monitor is wired using copper Cat5e/6e cable configured to provide 2 cores #

Volume levels, ring tone selection, camera activation, do not disturb and monitor to monitor communication are via the touch screen interface.

The monitor has the ability to connect to the end users WiFi network for call forwarding via 3G/4G to a maximum of 10 devices using the dedicated Vimar app.

The monitor can be semi flush mounted using the dedicated 40590 mounting box.



# 40515

## Tab 5S UP Two Wire Wi-Fi Colour Video Monitor

- 5" LCD Colour Touch Screen
- Integrated Wi-Fi for call repetition on smart phone with dedicated app
- Capacitive buttons for lock release and call acceptance
- Clear open voice communication
- Hearing aid compatible
- Surface or semi flush mounted
- Privacy of conversation
- User selectable ring tones
- Video voicemail facility
- Intercommunication with other devices

### Specifications

<b>System</b>	Two Wire video with built in Wi-Fi access capability
<b>Controls</b>	Capacitive buttons for Door Release and Call Acceptance. LCD Touch Display for user settings and additional functions. User control of brightness, volume and muting.
<b>Construction</b>	Moulded high impact plastic in White
<b>Dimensions</b>	148mm Wide x 158mm High x 24.4mm Deep (surface mounted) 13.1mm Deep (semi flush mounted when used with 40590 back box)
<b>Net Weight</b>	0.78 Kg

Form : 40515

Rev 1.0.0